
IT'S A NEW DIRECTION IN POLE CLIMBING



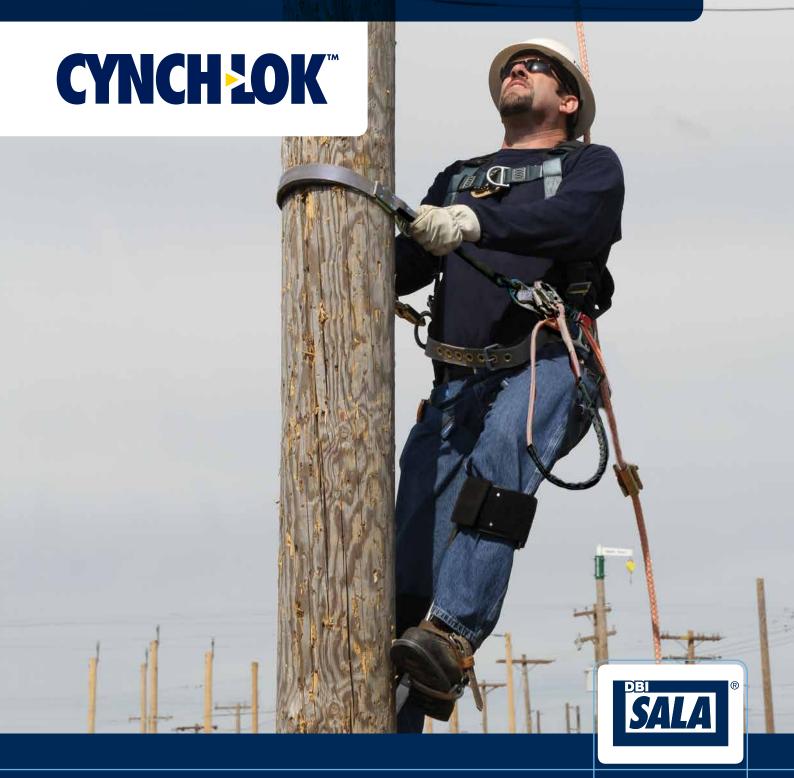

CYNCH-LOK™ GETS YOU THERE FASTER AND SAFER.

Climbing wood poles is one of the most difficult applications in the realm of height safety. So we took a new approach and asked electrical utility workers to help us make a better strap. The result is our new Cynch-LokTM Fall Restricting Pole Strap - the most user-friendly device of its kind.

Cynch-Lok[™] features almost effortless adjustment.

It allows you to easily hitch-hike poles (reposition, move or jump the strap upwards) with a hand position that's comfortable. It also moves past obstacles without difficulty.

Cynch-LokTM's unique design 'cynches' around a pole, gripping it and allowing you to position yourself where ever you need to be. When used correctly, it supports your full body weight allowing you to position yourself freely and reduces pressure on your back up fall arrest system.

As the global leader in fall protection, it's our goal to provide you with gear that's lightweight, easy to use and built for your demands.

► CYNCH-LOK™ FALL RESTRICTING POLE STRAP

CYNCH-LOK™ ADJUSTMENT

The exterior strap has simple "slide into place roller adjustment" that allows you to adjust to the pole's diameter during a climb with one hand.



LIGHTWEIGHT DESIGN

At 2.2kg, your Cynch-Lok™ becomes a tool - not a burden.

STANDARDS

Meets EN358 Work Positioning Standard.

Easy to use torsion spring for greater strength and enhanced mobility, allows user to position comfortably on the pole.

TECHNORA ROPE

Double braided rope with a technora core is cut and fire resistant, and yields high tensile strenath.

TECHNICAL SPECIFICATIONS

Item Number: 1204054

Pole Dimension Compatibility (Diameter/Circumference)

Min = 14cmMax = 40cm

SPECIFICATIONS

- ► Webbing Neoprene Impregnated Nylon
- Connectors Alloy steel 22kN tensile strength, 16kN gate strength
- Cynch-Lok™ Adjustor (turned o-ring) - High strength alloy steel construction with zinc plating for corrosion resistance
- ► Rope Adjustor Lightweight Machined aluminium with anodized finish
- Stopping Cleat Heat treated steel with zinc plating for corrosion resistance
- ► Rope 45kN tensile strength, Nylon core static kernmantle rope
- ► Rivets High alloy stainless steel semi tubular rivets
- ► Thread Size 346 Polyester threads



EUROPE, MIDDLE EAST & AFRICA

France

Le Broc Center Z.I. 1re Avenue – BP15 06511 Carros Le Broc Cedex FRANCE

t: +33 (0) 4 97 10 00 10 f: +33 (0) 4 93 08 <u>79 70</u>

United Kingdom

5a Merse Road North Moons Moat Redditch, Worcestershire B98 9HL UK

t: +44 (0) 1527 548 000 f: +44 (0) 1527 591 000

Dubai

ME Branch Office PO Box 17789 JAFZA, Dubai – U.A.E

t: 00 800 999 55500 f: +33 (0) 4 93 08 79 70

Germany

Hagener Strasse 44 D-57489 Drolshagen Deutschland

t: +49 (0) 2 76 18 33 82 29 f: +40 (0) 2 76 18 33 81 93

CUSTOMER SERVICES

(00 800 999 55500

information@capitalsafety.com www.capitalsafety.com

GLOBAL LEADER IN FALL PROTECTION

Capital Safety is one of the world's leading manufacturers of fall protection and rescue equipment, with decades of experience and a legacy of innovation.

We understand the industries we serve and listen to the workers in the field. We employ the best engineers to create innovative solutions and patent the products that keep workers safe at heights around the world. Capital Safety has the best quality and largest range of fall protection products in the industry. But we're more than a product company.

We take an innovative approach in bringing our products to the field. We have created international partnerships and a vast network of authorized distributors, certified installers and service centres. We offer on-site and in-house training.

Look for complete solutions in our extensive line of DBI-SALA® and Protecta® products.



