
# **PRO-Line™ Temporary Horizontal Lifeline**





# **PRO-Line™ Temporary Horizontal Lifeline**

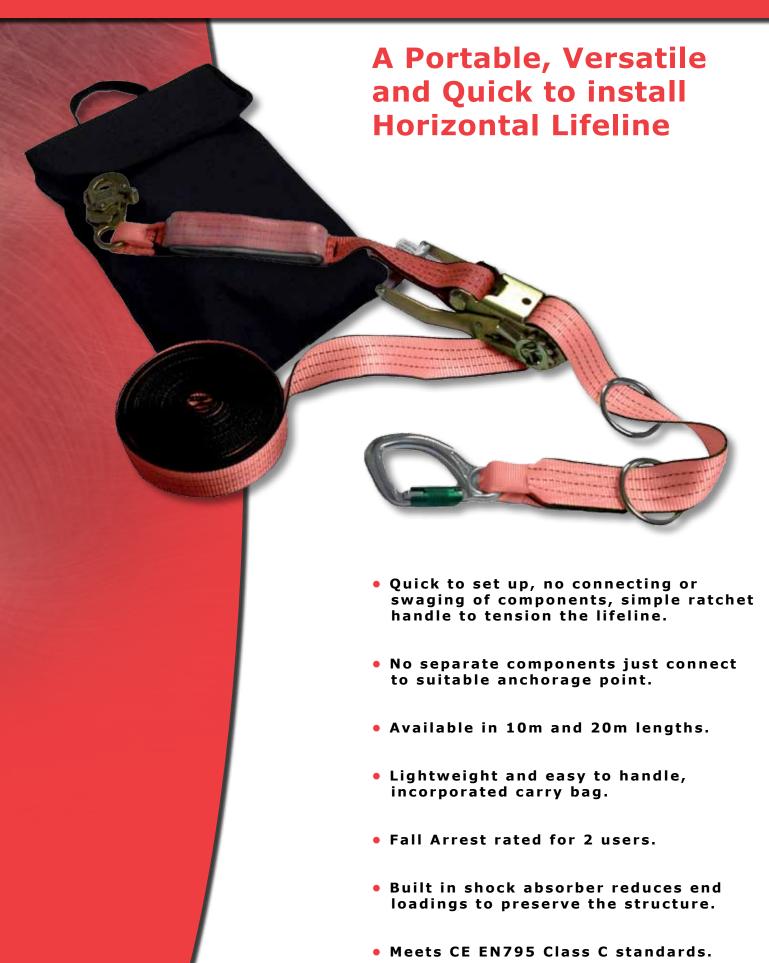

## Easy and quick installation

There are many instances where a horizontal lifeline to ensure the safety of a user is the best practical option, but the time spent assembling and installing the system make it impractical to do so. What is needed is a quick means of installing the system so work is unaffected.

The new Pro-Line allows just that. Simply attach the karabiners to suitably rated anchorage points (22kN) and tension the line via the integrated ratchet and the system is ready to use.

The line can be used in any length up to either 10m or 20m, dependent on the version bought.

### **Confidence**

The integrated bag allows the excess webbing to be stored in there that is not being used.

This can help prevent damage from foot traffic, dirt and wear, thus improving the lifespan of the line. The in-built shock absorber also doubles as a fall indicator, so if the line has sustained a fall, it can be seen and the line discarded, so not posing a safety risk to others. Connection to the line is made by attaching the karabiner of a shock absorbing, or fall arrest lanyard directly to the line, again, reducing the potential for lost or damaged components.

### Large range of applications

The Pro-Line is suitable for many applications, especially those where work is only required at a point for a limited amount of time. The quick and easy assembly and dis-assembly makes it suitable for these types of applications. Construction work is a major area where the advantages of the Pro-Line can be utilised. Once the work is done on one area, the line is taken down and set up at the next work point.

# **PRO-Line™ Models:**

**1200106** - 10m PRO-Line™ Horizontal Lifeline **1200107** - 20m PRO-Line™ Horizontal Lifeline

# Quick and easy to install: Step 1



Remove the web from the bag and attach one end to a suitable anchor point.

# Step 2



Open ratchet and attach to opposite anchor.

# Step 3



Close ratchet and tension. Place excess web in bag.

# Step 4



Open ratchet to loosen Lifeline and remove from anchor. Place back into bag.

### Specifications:

**Body Webbing:** Strength: 50kN - Material: 50mm Polyamide web - **Strap Webbing:** Strength: 44kN - Material: 50mm Polyamide web - **Ratchet:** Strength: 22kN - Material: Steel - **Standard:** meets CE EN795 Class C.

Capital Safety - Europa, Middle-East, Africa
Le Broc Center Z.I. 1<sup>re</sup> Avenue 5600 m B.P. 15
06511 Carros Le Broc Cedex - Frankreich
Tel: + 33 (0)4 97 10 00 10 • Fax: + 33 4 93 08 79 70
e-mail: information@capitalsafety.com

Capital Safety Group - Northern Europe
Unit 7 - Christleton Court - Manor Park
Tel: + 44 (0)1928 571324 • Fax: + 44 (0)1928 571325
e-mail: csgne@capitalsafety.com

www.capitalsafety.com