



Next generation features:

Saves time


- ► Installs 60% faster*
- Inspect easily and quickly

Built to last

Nitrile rubber cover lasts 4X longer than outgoing model*

Tie-off versatility

► Foot-level tie off with 140 kg capacity

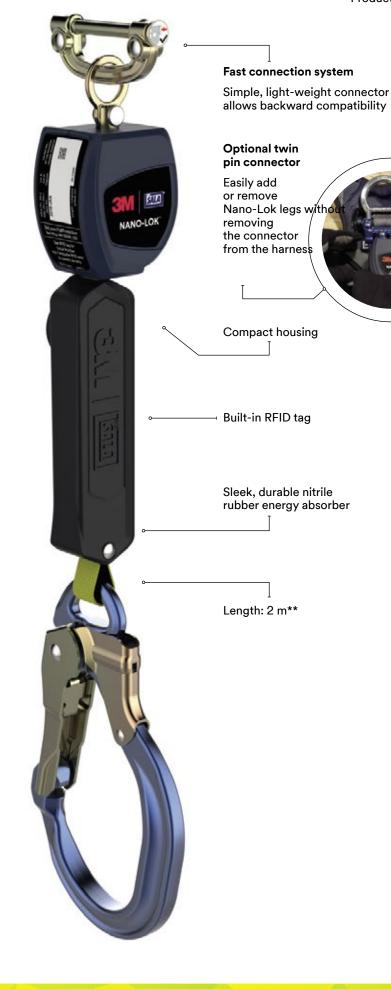

^{*}Compared to previous generation.

^{**}Most models 2m, variations in top and bottom connectors mean some models measure between 1.9 m or 2.1 m.

3M[™] DBI-SALA[®] Nano-Lok[™] Single-leg range

Top connector (Housing side) Specific feature / application	Bottom connec (Lanyard end) Specific feature application		Part number	∢···· ≻	
Aluminium Carabiner 19 mm (3/4") opening Connects to a D-Ring attachment point on a fall arrest harness		Aluminium Hook 57 mm (2-1/4") opening Popular model	3101208	2.0 m	
		Aluminium Carabiner 19 mm (3/4") opening Lightweight	3101264	1.9 m	
		Aluminium Hook 57 mm (2-1/4") opening • Heavy-duty gate	3101263	2.0 m	
		Aluminium Hook Comfort Grip 63.5 mm (2-1/2") opening Helps protect users hand Heavy-duty Ideal for cross-loading	3101709	2.1 m	
Triple Action Steel Carabiner 19 mm (3/4") opening • Allows the addition of a second device to convert to a twin- leg unit	07.50	Steel Snap Hook 19 mm (3/4") opening • Economical solution	3101265	2.0 m	
		Aluminium Hook 57 mm (2-1/4") opening Popular model	3101461	2.0 m	
Steel Fast Connection System Connects through the harness dorsal web - leaving the dorsal D-ring free for rescue operation		Aluminium Hook 57 mm (2-1/4") opening Popular model	3101207	2.0 m	
		Aluminium Hook 57 mm (2-1/4") opening • Heavy-duty gate	3101261	2.0 m	
		Aluminium Hook 63.5 mm (2-1/2") opening Heavy-duty	3101730	2.0 m	

3M™ DBI-SALA® Nano-Lok™ Twin-leg range

Top connector (Housing side) Specific feature / application	Bottom connector (Lanyard end) Specific feature / application		Part number	∢···· ≻	
Triple Action Steel Carabiner 19 mm (3/4") opening To be connected through the harness dorsal web or on the dorsal fall arrest D-ring		Aluminium Hook 57 mm (2-1/4") opening • Popular model	3101316	2.0 m	
Steel Fast Connection System Connects through the harness dorsal web - leaving the dorsal D-ring free for rescue operation		Aluminium Hook 57 mm (2-1/4") opening • Popular model	3101298	2.0 m	
		Aluminium Hook 57 mm (2-1/4") opening • Heavy-duty gate	3101270	2.0 m	
		Aluminium Hook Comfort Grip 63.5 mm (2-1/2") opening Helps protect users hand Heavy-duty Ideal for cross-loading	3101718	2.0 m	B
		Aluminium Hook 63.5 mm (2-1/2") opening • Heavy-duty	3101719	2.0 m	

Top connectors can be ordered separately using the following references

Part number	Description
2000025	Aluminium Carabiner 19mm(3/4") opening
3100128	Triple Action Steel Carabiner 19 mm (3/4") opening

Part number	Description
3100481	Fast Connection System (For use only with 3M™ DBI-SALA® Nano-Lok™)
3100484	Twin Pin Connector (For use only with Nano-Lok™)



